


## ZyXEL VMG1312-B10D EtherWAN Setup for Fibre Internet Connection (via Wizard)


With an Ethernet cable (RJ45), connect the Telkom supplied fibre modem to the ZyXEL VMG1312-B10D router on LAN port 4.

Connect via Ethernet cable or wireless to the ZyXEL VMG1312-B10D for configuration. See QIG or User Manual for steps to connect to the router.

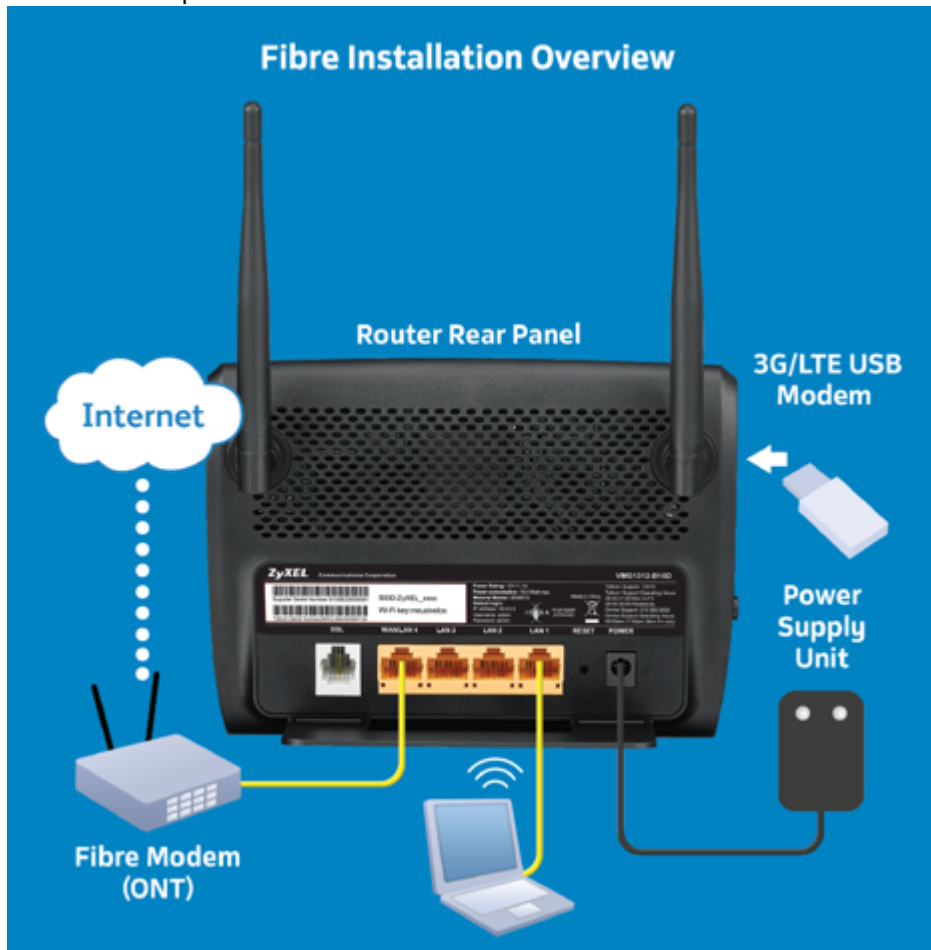

Open web browser, on the address bar type 10.0.0.2.

Enter username (**admin**) and password (**admin**). Go through the steps to change the password if this is the first logon.

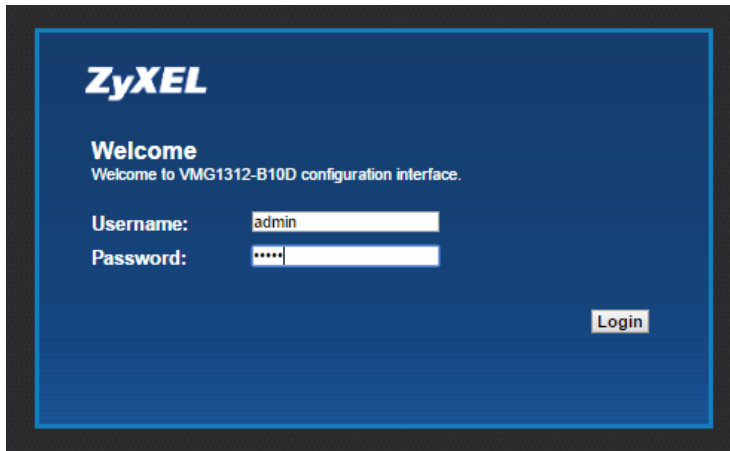

**ZyXEL**


**Welcome**  
Welcome to VMG1312-B10D configuration interface.

Username:

Password:

Login

Change your Password.

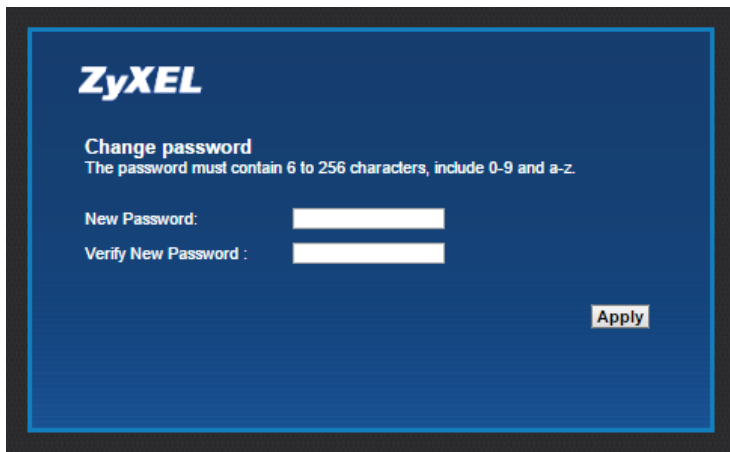

**ZyXEL**


**Change password**  
The password must contain 6 to 256 characters, include 0-9 and a-z.

New Password:

Verify New Password :

Apply

Log in using new password.



**ZyXEL**

**Welcome**  
Welcome to VMG1312-B10D configuration interface.

Username:

Password:

Login

ZyXEL VMG1312-B10D User Guide English Quick Start Logout

Status Refresh interval None

Device Information	
Host Name:	VMG1312-B10D
Model Number:	VMG1312-B10D
Serial Number:	S152E13900052
Firmware Version:	V5.11(AAZX.1)C0
WAN Information	
LAN Information	
- IP Address:	10.0.0.2
- IP Subnet Mask:	255.255.255.0
- IPv6 Link Local Address:	fe80::2a28:5dff:fe2:a198
- DHCP:	Server
- MAC Address:	28:28:5D:F2:A1:98
WLAN 2.4GHz Information	
- MAC Address:	28:28:5D:F2:A1:99
- Status:	On
- SSID:	ZyXEL_A199
- Channel:	Auto(Current 6)
- Security:	WPA2-Personal
- 802.11 Mode:	802.11b/g/n Mixed

System Status	
System Up Time:	0days: 0hours: 2minutes
Current Date/Time:	1970-01-01/00:03:08
System Resource:	
- CPU Usage:	1%
- Memory Usage:	52%
- NAT Session Usage:	0.4% 79/20480

Interface Status		
Interface	Status	Rate
LAN1	No Link	N/A
LAN2	Up	100M / Full
LAN3	No Link	N/A
WLAN 2.4GHz	Up	144 Mbps
Ethernet WAN	No Link	N/A
DSL	No Link	N/A

Network Map  
Virtual Device

Connection Status
Network Setting
Security
System Monitor
Maintenance

Open the Quick Start wizard from the top right hand corner of the page.

Quick Start X

**Welcome to Quick Start wizard** Step 1 of 7

.....


This wizard will guide you through the configuration of the modem.  
Please make sure that you completed all the steps in the Quick Start Guide before starting this wizard.

Please select the interface:


xDSL v  
 xDSL  
**Ethernet**

Next Close

Step 1: Select 'Ethernet' from the drop-down list.

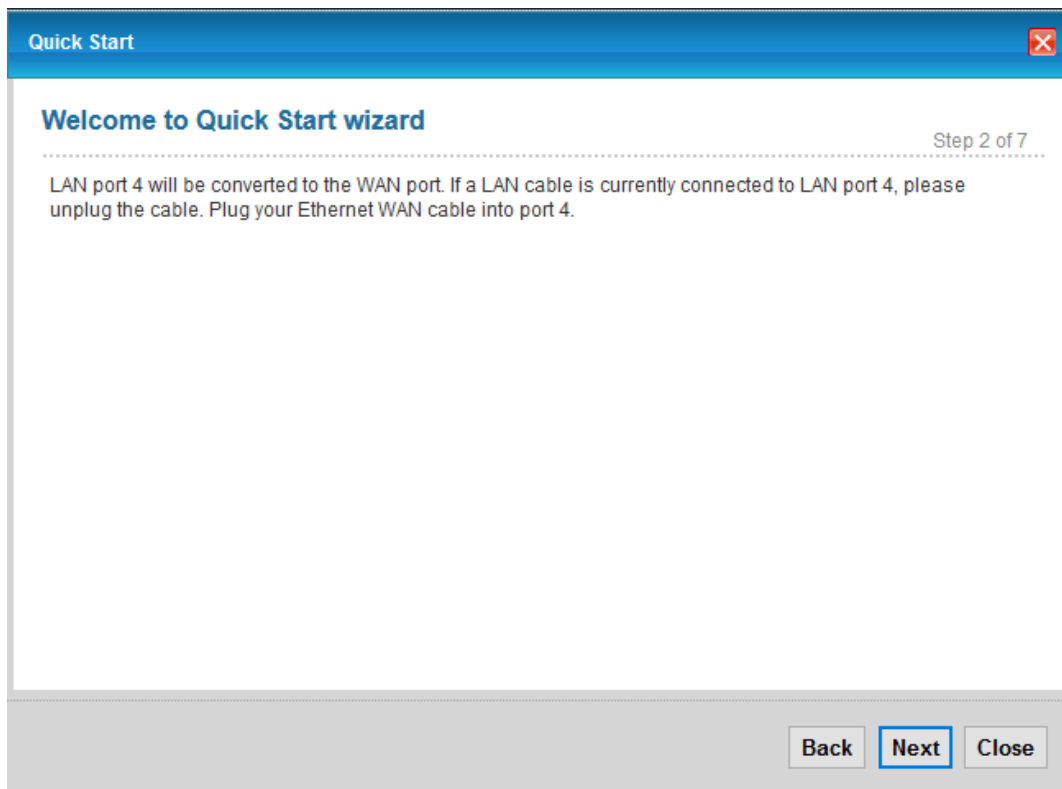


Step 2: Follow the instructions in the GUI. Click on Next, which will take you to Step 5.

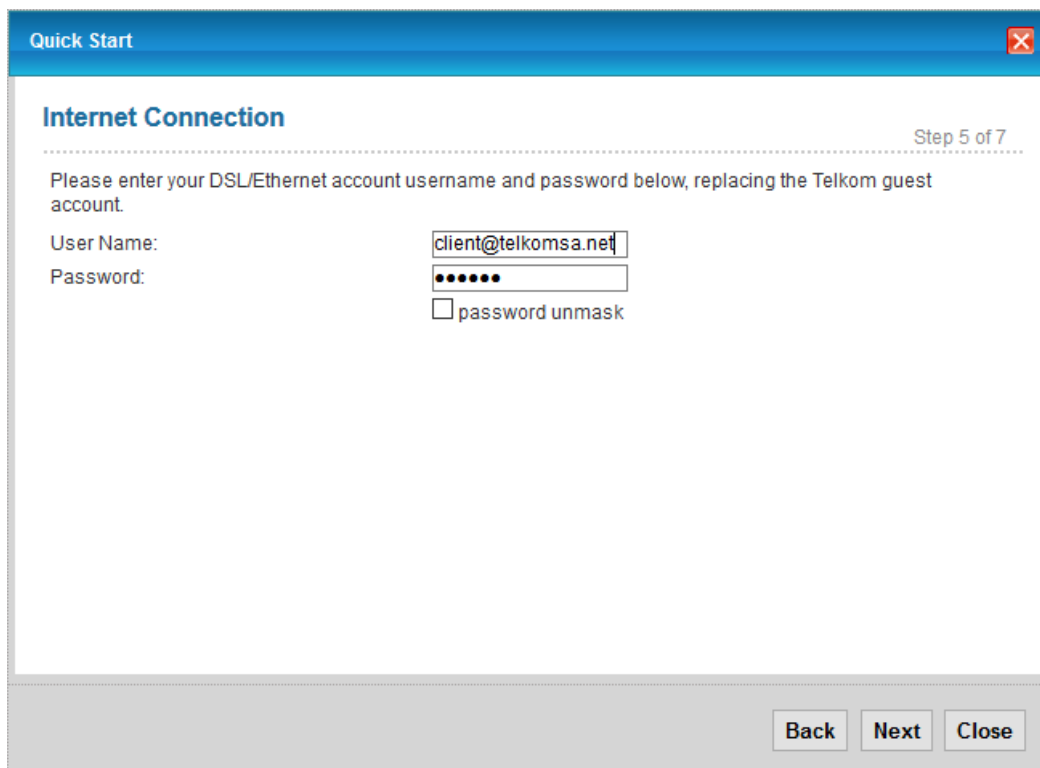

Step 5: Enter your username and password, supplied by Telkom, and click Next.

Step 6: Setup your Wireless Network, if required, and click Next.

Step 7: Setup 3G/LTE Failover (if required). Click Next.

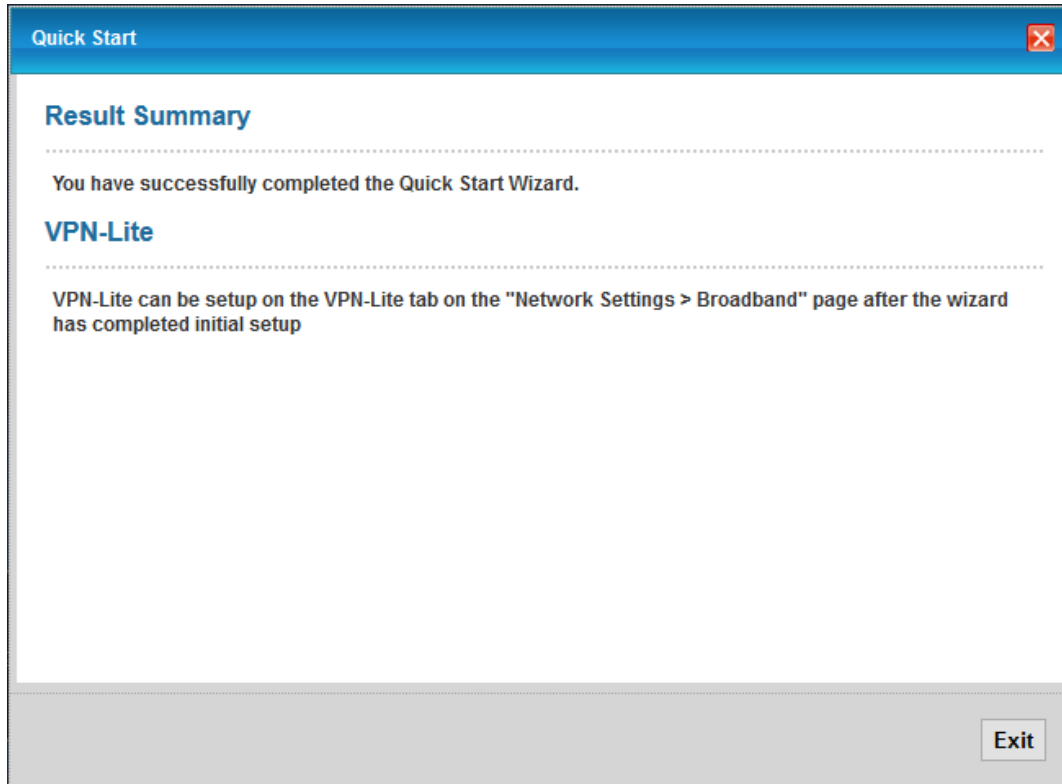

Setup is complete and you should now be connected to the internet via your fibre modem.